

A

B

C

D

1




2

3

4

5

6

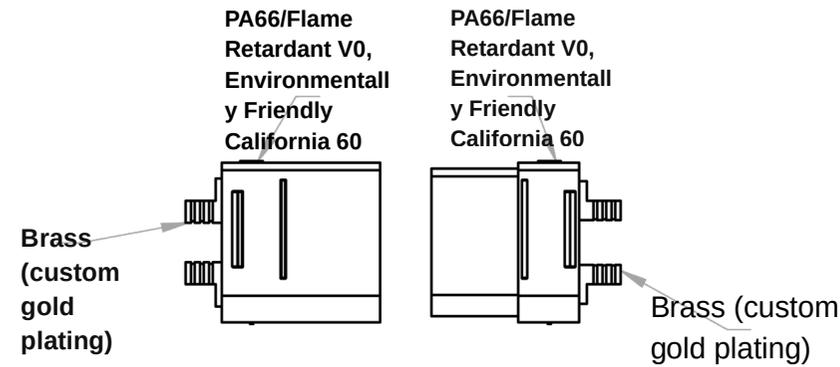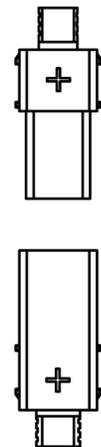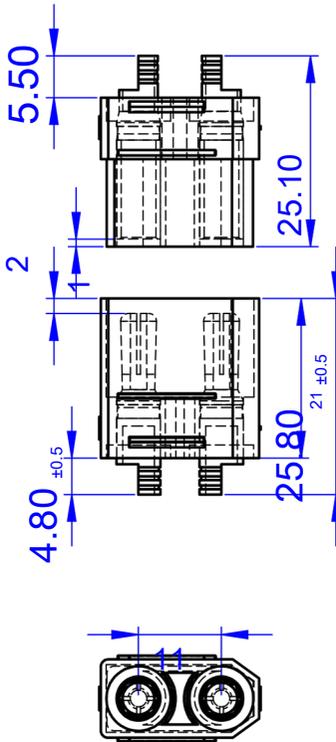

Rated voltage: DC500V Rated current: 40A
 Instantaneous current: 90A
 Insulation shell material: PA
 Metal head material: gold plated Flame retardant rating: UL94 V0
 Recommended wire gauge: 10AWG
 Contact resistance: 0.3 milliohm
 Number of uses: 1000 times
 Working environment temperature: -20 °C ~ 120 °C

**XT90
Dimensions**

A4

1

2

3

4

5

6